

# Technical Data Sheet

## X-Air™ P

### Description



In cementing, foam created during mixing can cause pump cavitation and decrease cement density, consequently impacting the strength of the cement.

Hexion's X-Air™ P cement powder antifoam is a dry powder designed to de-aerate and control foam in cement systems, leading to better density control for a more accurately mixed slurry. The system utilizes a unique chemistry that is effective in a wide variety of cement formulations containing additives such as naphthalene sulfonate, sodium chloride, and fluid loss additives.

### Key Features And Typical Benefits

- Stops foam formation in cement slurries
- Effective in a wide variety of cement formulations containing additives such as naphthalene sulfonate, sodium chloride, and fluid loss additives
- Effective in all classes of cement
- Free flowing powder with decreased clumping compared to competitive product
- Storage stable in wide temperature and humidity range

### Typical Properties

Property	Value	Unit	Test Method
Absolute Volume	0.0618	gal/lb	
Bulk Density	53.06	lb/ft <sup>3</sup>	
Color	Light Tan		
Flash Point	0.0618	°F [°C]	Pensky-Martens, Closed Cup, ASTM-D-93
Physical Form	Solid		
Specific gravity	1.94		
Typical % Solids	99	%	

Typical product values determined on commercial material whose properties might vary within the specification limits. Typical data values should not be used as specifications. Assistance and specifications are available from Hexion.

### Highly Effective In Systems With A Variety Of Additive

X-Air™ P

<https://www.hexion.com/en-US/product/x-air-p>

Generated: January 27, 2022


Issue Date:

Revision: 1/1/1900 12:00:00 AM

® and ™ Licensed trademarks of Hexion Inc.

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. **HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION**, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.

# Antifoam Comparison in 0.5% HEC, 0.5% Naphthalene Sulfonate

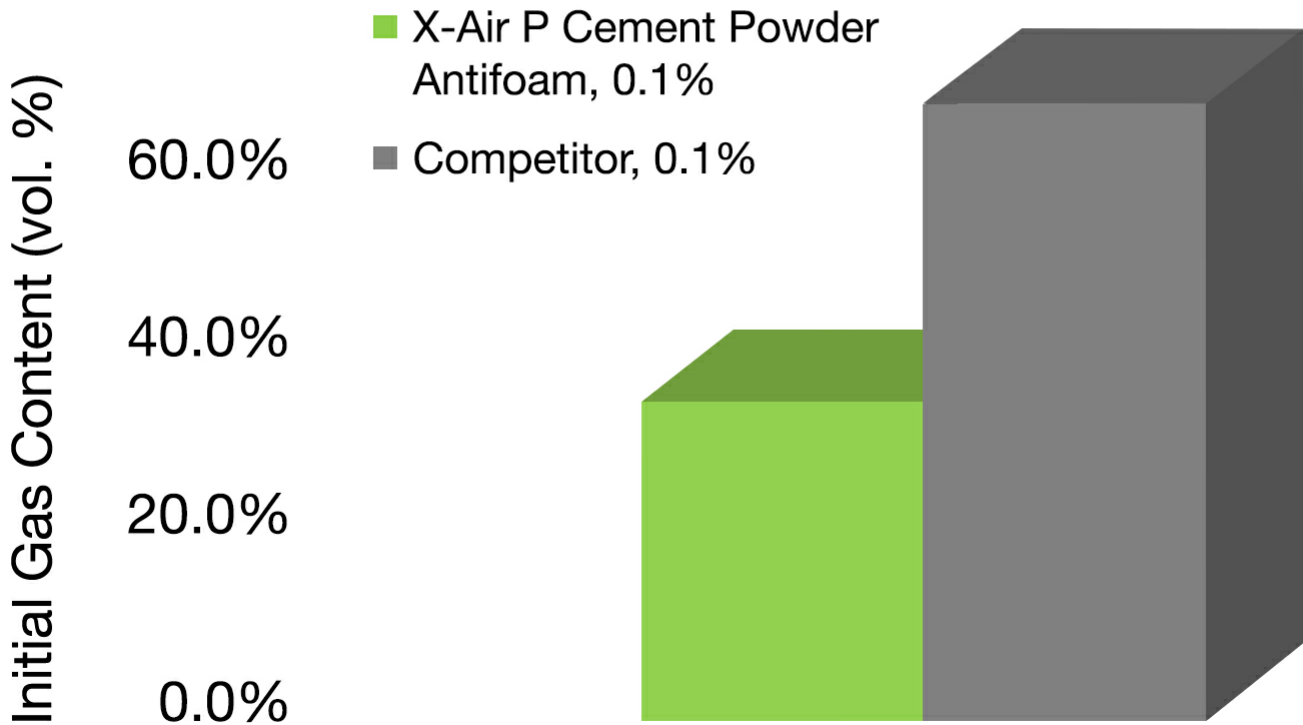

## Limitations

Customers must evaluate Hexion products and make their own determination as to the fitness of use in their particular applications.

## Product Safety, Handling, And Storage

Always wear proper PPE, gloves, and safety glasses. Wash hands and face after handling. Use only with adequate ventilation and wear an appropriate respirator if necessary. Keep product in the original container or an approved alternative made from compatible material. Do not reuse empty containers as they may contain hazardous residue.

Store in original container protected from direct sunlight in a dry, cool, and well-ventilated area away from strong oxidizers, food, and drink. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

## Contact Information

Hexion  
Oilfield Technology Group  
15366 Park Row  
Houston, Texas 77084 USA  
+1 281 646 2800  
[www.hexion.com/oilfield](http://www.hexion.com/oilfield)

Customer Service  
+1 800 626 2116  
[olg.customerservice@hexion.com](mailto:olg.customerservice@hexion.com)

Technical Inquiries  
[olg.customerservice@momentive.com](mailto:olg.customerservice@momentive.com)

X-Air™ P

<https://www.hexion.com/en-US/product/x-air-p>

Generated: January 27, 2022

Issue Date:

Revision: 1/1/1900 12:00:00 AM

© and ™ Licensed trademarks of Hexion Inc.

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. **HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION**, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.