

Technical Data Sheet

Black Pro™ Proppants

Description



Black Pro™ proppants are an advanced curable resin coated fracturing sand available in a 40/70 mesh size. Black Pro resin is applied to a high quality frac sand. Incorporating Hexion's Stress Bond™ technology, the proppant bonds in the fracture with closure stress, providing high conductivity and proppant flowback control.

Typical Applications

Fracture treatments:

- At closure stress up to 12,000 psi [83 MPa]
- Where high conductivity and proppant flowback control are desired

Technical Advantages and Benefits

- Reduces proppant fines generation and migration
- Helps prevent proppant flowback
- Stress Bond technology helps prevent wellbore consolidation
- Frac fluid and breaker friendly

Typical Properties

Black Pro™ Proppants
<https://www.hexion.com/en-US/product/blackpro>

Generated: December 5, 2022
Issue Date:
Revision:

® and ™ Licensed trademarks of Hexion Inc.

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. **HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION**, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.

Property	Value	Unit
Absolute Volume	0.385 [0.0461]	cm ³ /g [gal/lb]
API Mesh Size	40/70	
Bulk Density	1.47 [12.3]	g/cm ³ [lb/gal]
Color	pink to red	
Composition	resin coated frac sand	
Median Particle Diameter	0.3036	mm
Particle Size Distribution	meets or exceeds API RP 19C	
Physical State	solid granule	
Pipe Fill Factor	0.680 [0.0813]	cm ³ /g [gal/lb]
Resin Type	thermosetting, curable	
Solubility in Water, Brine & HCl	nil	
Specific gravity	2.60	
Turbidity	250	NTU (FTU)

Technical Considerations


- Grain-to-grain contact must occur and closure stress must be applied during the cure period for proper bonding

Long-Term Conductivity

Stim-Lab, Inc. Consortium Long-Term Baseline Procedure

Proppant Concentration: 2 lb_m/ft² [9.8 kg/m²], Temperature: 250°F [121°C]

Closure Stress (psi)	2,000	4,000	6,000	8,000	10,000
Size	40/70				
Conductivity (md-ft)	1090	877	569	271	151

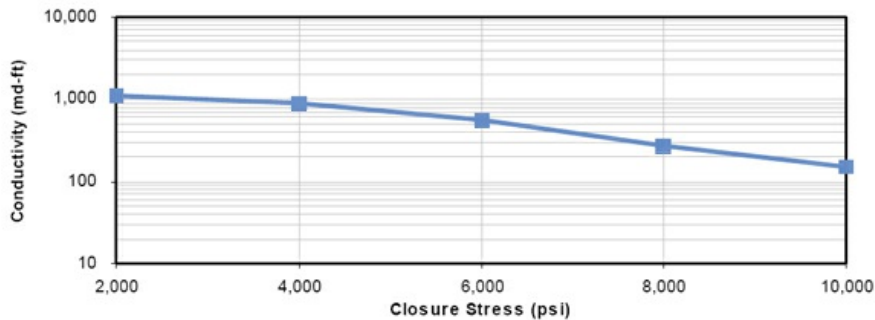

Contact Information

Hexion
Oilfield Technology Group
15366 Park Row
Houston, Texas 77084 USA

Customer Service
+1 800 626 2116
otg.customerservice@hexion.com

Technical Inquiries
otg.customerservice@momentive.com

BlackPro™ Proppants
<https://www.hexion.com/en-US/product/blackpro>

Generated: December 5, 2022
Issue Date:
Revision:

© and ™ Licensed trademarks of Hexion Inc.

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. **HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION**, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.

Black Pro™ Proppants
<https://www.hexion.com/en-US/product/blackpro>

Generated: December 5, 2022
Issue Date:
Revision:

® and ™ Licensed trademarks of Hexion Inc.

The information provided herein was believed by Hexion Inc. ("Hexion") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product and to determine the suitability of the product for its intended use. All products supplied by Hexion are subject to Hexion's terms and conditions of sale. **HEXION MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY HEXION**, except that the product shall conform to Hexion's specifications. Nothing contained herein constitutes an offer for the sale of any product.